
NAVnet 3D/TZ touch Connect

FURUNO

COLOR LCD SOUNDER

Model FCV-1150

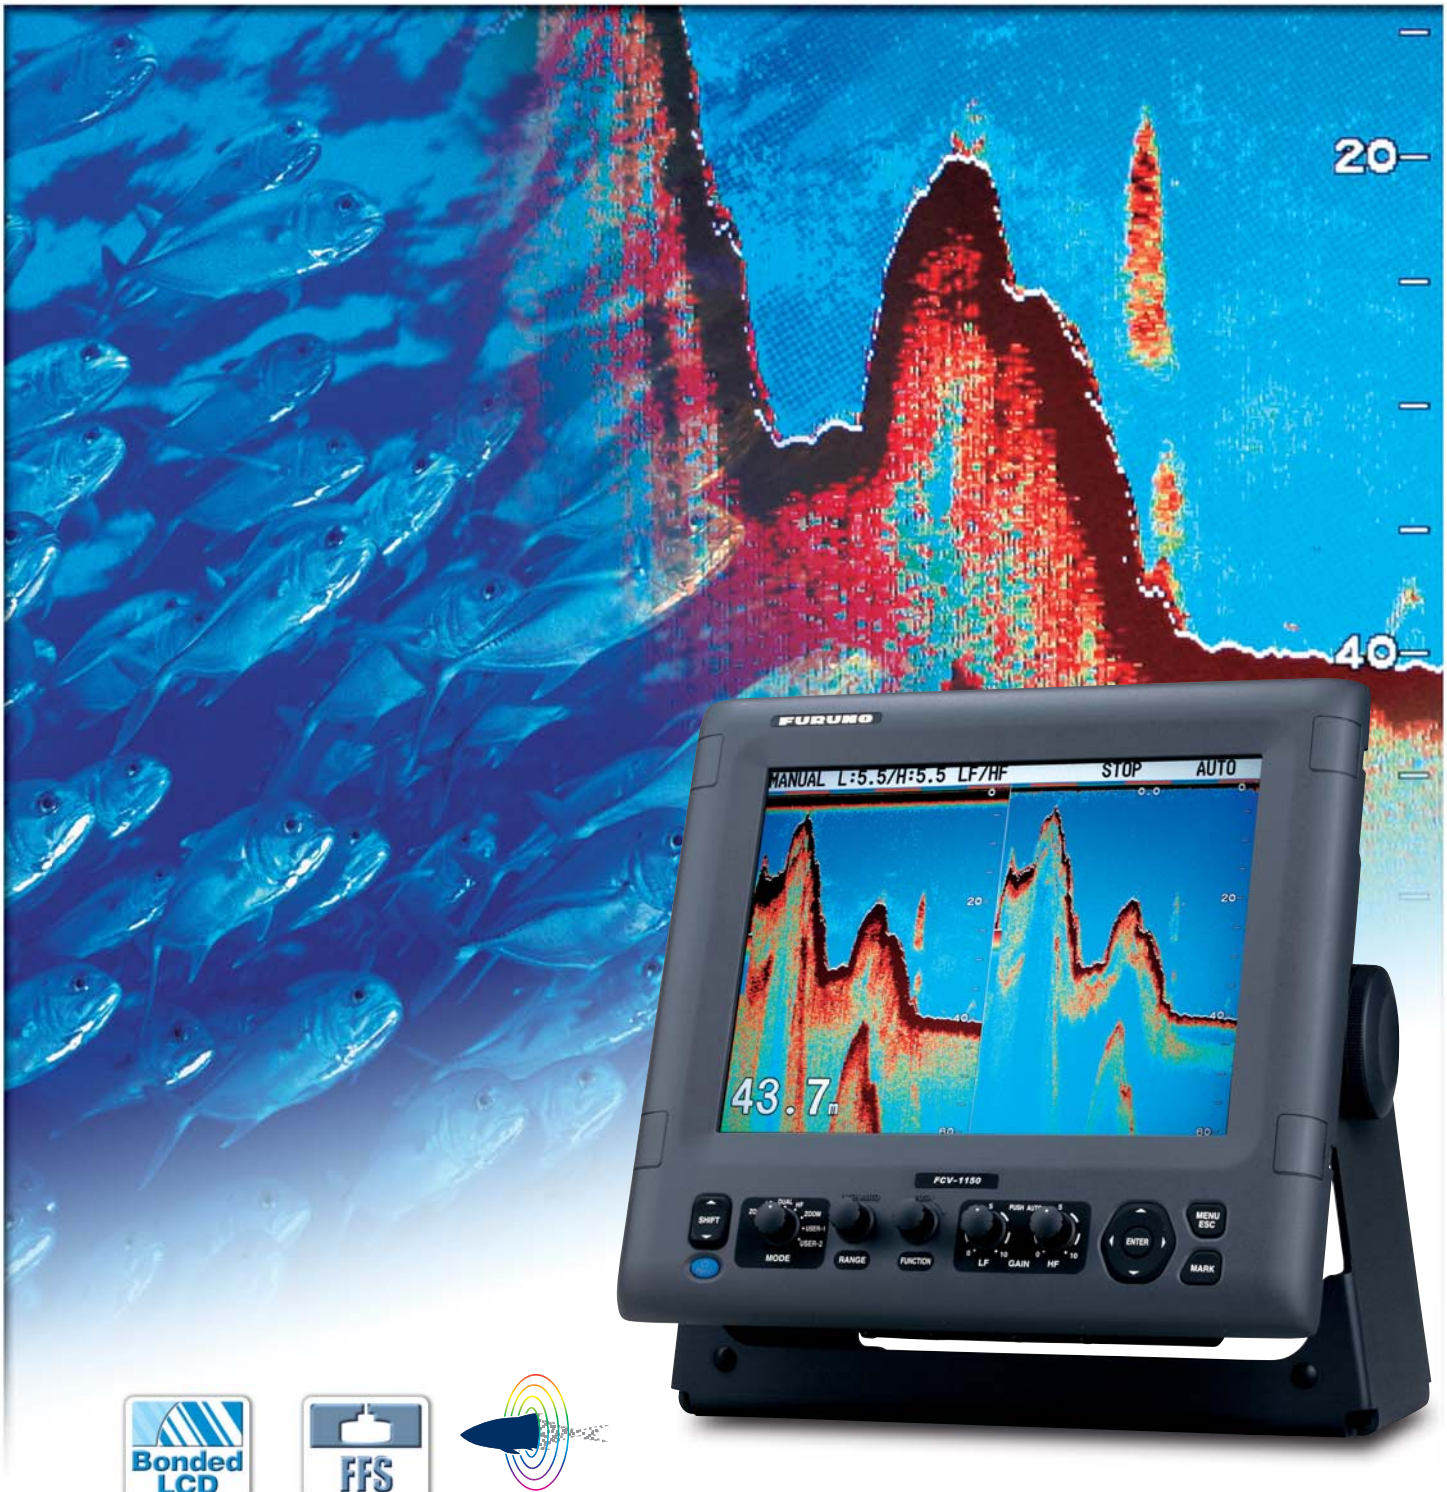

Bonded LCD

Bonded LCD

FFS

FURUNO Free Synthesizer Transceiver

FDF

FURUNO Digital Filter

www.furuno.com

High performance 12.1" LCD digital fish finder

The FCV-1150 is a new color digital sounder designed for a variety of professional fishing operations. It features a high-brightness, bonded 12.1" LCD display with AR-coated glass filter and anti-polarized sunglass filter, providing superior viewing even in direct sunlight. You can choose to display the echo presentation in 8, 16, or 64 colors, with color assignment dependent on the strength of the returned echo. The FURUNO Free Synthesizer (FFS) Transceiver allows for a wide selection of operating frequencies. You may choose any two frequencies between 28 and 200 kHz to best suit your fishing operation. Output power is selectable from 1, 2 or 3kW. A wide variety of display modes and functions are available that provide skippers with simple and intuitive information. The FCV-1150 can also be connected to a FURUNO satellite compass to compensate for heaving, thus providing unwavering, stable detection even in rough seas.



COLOR LCD SOUNDER

Model **FCV-1150**

Bonded LCD

FURUNO Free Synthesizer Transceiver


FURUNO Digital Filter

- *High-brightness (1,100 cd/m^2) Bonded LCD with AR coated glass filter and anti-polarized sunglass filter delivers clear view in all weather conditions*
- *Post-processing gain control applies changes to gain setting to all existing returns on the display*
- *Available Heaving Compensation provides stable echo presentation even in rough seas* (Satellite Compass required)
- *FURUNO Digital Filter (FDF) delivers crystal clear target presentation*
- *FURUNO Free Synthesizer (FFS) allows for adjustable operating frequency*
- *Integration into the NavNet 3D/TZtouch network is available*
- *White Edge bottom discrimination*


der delivers super clear view of fish targets!

Quick Gain Setting

With conventional gain controls, changes are made for new echoes only when a change in the setting is applied. With the FCV-1150's Quick Gain control, changes in the Gain setting are applied to new echoes as well as all of the echoes already on the screen. Because the changes are applied to both new and existing returns, you will be able to quickly and easily find the right Gain setting for your conditions.

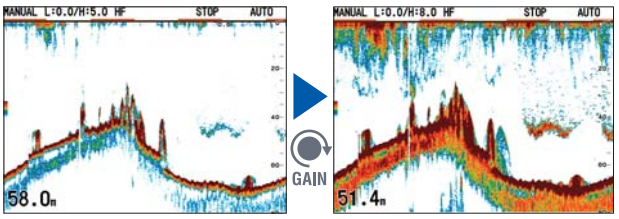


Gain: 5 Gain: 8



Conventional gain setting

Faster TX Rate For Detailed Detection


The rate of transmission is increased by more than 30% compared to current conventional fish finders. As a result, more detailed information about underwater conditions can be gained through the same sounding interval. This means that the transmission speed is raised in shallow waters, and lowered in deep waters. The high-speed transmission provides for detailed detection of seabed targets.

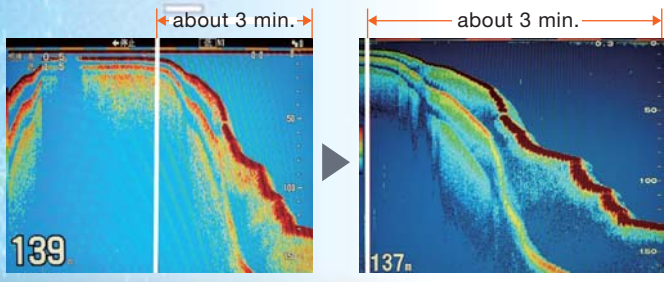

FCV-1100L FCV-1150


Heaving Compensation

Even in rough sea conditions, the FCV-1150 compensates for heaving, presenting a display without undulations caused by the sea conditions. FURUNO Satellite Compass SC-30, SC-50 or SC-110 required.

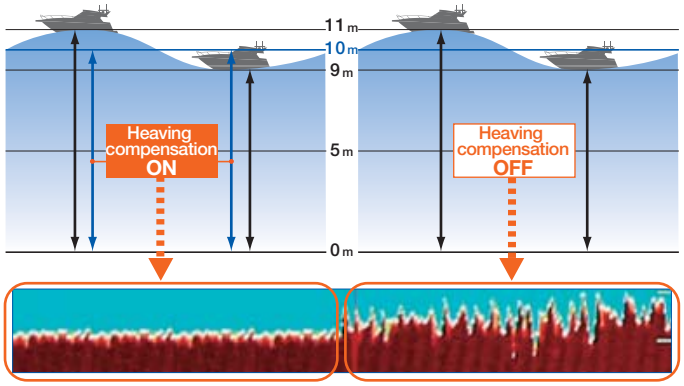

Operating Frequency Adjustment

If a FURUNO transducer is used, the operating frequency is automatically set in the menu. The user can shift the operating frequency at any time from the menu. With the FURUNO 82B-35R transducer, the operator can select any operating frequency from 65 to 110kHz. This feature is particularly useful for vessels targeting many different species, or when the fish finders of other ships in the area cause interference.

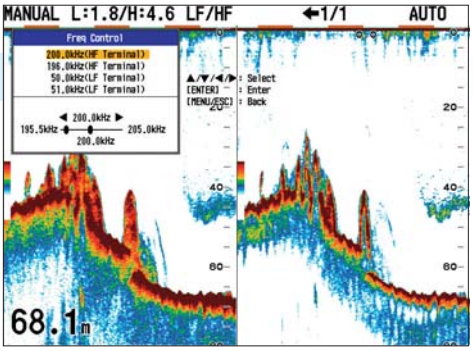

Function Key

An often-used function such as TVG (Time Varied Gain) can be programmed to register with the press of the Function key. This will give you access to any menu item without opening the menu.



Functions which can be registered

Pic. Advance / Interference / Color Erase / Clutter / White Line / White Marker / TVG / STC / Bottom Zone / A-Scope / Split Range / Auto Shift / Freq Choice / Freq Control

Network integration with NavNet 3D/TZtouch



Via Ethernet interface, the FCV-1150 brings professional fish finding technologies onto the NavNet 3D/TZtouch network.
This advanced configuration enables you to install the FCV-1150 anywhere onboard you wish within the reach of a LAN cable.
Auto range, auto gain, shift and zoom controls can be performed from both NavNet 3D/TZtouch and the FCV-1150*.

* Manual gain control and mode selection can only be done by the FCV-1150.

COLOR LCD SOUNDER

Model **FCV-1150**

SPECIFICATIONS OF FCV-1150

GENERAL

1. Operating Frequencies
The synthesized transceiver works with dual frequencies in 28 to 200 kHz. Specify transducer type when ordering, among 28/38/50/68/82/88/107/150/200 kHz

2. Output Power 1/2/3 kW

3. Power Reduction Auto/10 to 100 % (in 10 % step)

4. Tx Rate 5 to 3000/min

5. Pulselength Short1/Short2/Standard/Long/Manual (Manual Pulse length: 0.05 to 5.0 ms)

6. RX Band Narrow/Standard/Wide

7. Amplifier High dynamic range

DISPLAY

1. Display 12.1" color LCD (SVGA: 800 x 600)

2. Color 8/16/64

3. Brightness 1,100 cd/m²

4. Ranges 5 to 3000 m (Split Range available)

5. Shift 0 to 2000 m

6. Marker Zoom/Bottom-lock Expansion Ranges
5 to 2000 m

7. Display mode Single (HF/LF), Dual, Single + Zoom, two Custom Modes
Zoom Mode (Bottom Lock, Bottom Zoom, Marker Zoom), Mix Mode, Nav data, A-scope

8. Picture Advance Direction Left, Right, L/R

9. Picture Advance Speed
Stop, 1/16, 1/8, 1/4, 1/2, 1/1, 2/1, 4/1, Synchronized with own ship speed

10.Alarms Audio-visual alarms for a preset value of depth, fish and water temperature

11.Language English, French, Spanish, German, Italian, Portuguese, Swedish, Danish, Norwegian, Finish, Greek, Chinese, Japanese, Thai, Korean, Russian

12.Others Auto Mode, Interference, Clutter, TVG, Color Erase, Hue, Temp Graph, A-scope, White Marker

Added Function Heaving compensation

DATA INTERFACE

NMEA0183 (Ver. 1.5, 2.0 or 3.0; Any talker)

Input: BWC, GGA, GLC, GLL, GNS, GTD, HDG, HDT, MDA, MTW, MWV, RMA, RMB, RMC, VHW, VTG, XTE

Output: DBT, DBS, DPT, MTW*, TLL, VHW, RMB, $PFEC pidat/SDmrk
*Optional sensor required

Other: LAN

ENVIRONMENTAL CONDITIONS

Display Unit: -15 ºC to +55 ºC (IEC60945 tested)

Water Resistance: IP55 (When flush mounted)

POWER SUPPLY

12-24 VDC: 3.3-1.7 A. 100/110/220/230 VAC with optional rectifier

EQUIPMENT LIST

Standard

1. Display Unit
2. Installation Materials and Standard Spare Parts

Option


1. Speed/temperature sensor
   ST-02MSB (Thru-hull, bronze), ST-02PSB (Thru-hull, plastic)
2. Temperature sensor
   T42 (Thru-hull, bronze), T80 (Transom, stainless steel)
3. NMEA cable MJ-A6SPF0003-050C (5 m)
   CO-SPEVV-SB-C 2P x 0.2SQLF (5/10/15 m)
4. Rectifier PR-62
5. Transducer (Specify the frequency and type of transducer)

1 kW: 28F-8 (28 kHz), 50B-6/6B (50 kHz), 50B-9B (50 kHz), 68F-8H (68 kHz), 88B-8 (88kHz), 200B-5S (200 kHz), 50/200-1T (50/200 kHz)


2 kW: 28F-18 (28 kHz), 28BL-6HR (28 kHz), 38BL-9HR (38 kHz), 50B-12 (50 kHz), 50BL-12/12HR (50 kHz), 82B-35R (82 kHz), 88B-10 (88 kHz), 200B-8/8B (200 kHz)

3 kW: 28F-24H (28 kHz), 28BL-12HR (28 kHz), 38BL-15HR (38 kHz), 50F-24H (50 kHz), 50BL-24H/24HR (50 kHz), 68F-30H (68 kHz), 88F-126H (88 kHz), 100B-10R (100 kHz), 150B-12H (150 kHz), 200B-12H (200 kHz)

DISPLAY UNIT FCV-1150 8.2 kg 18.1 lb

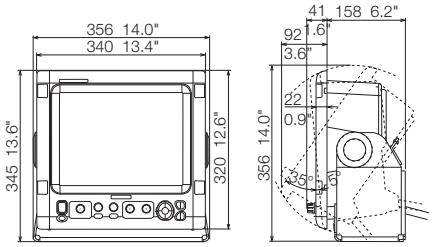


Flush mount
6.8 kg 15.0 lb

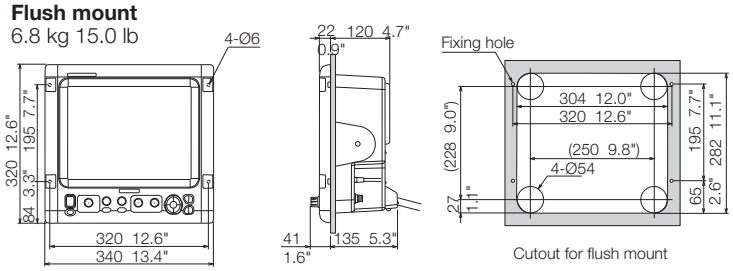

Cutout for flush mount

INTERCONNECTION DIAGRAM

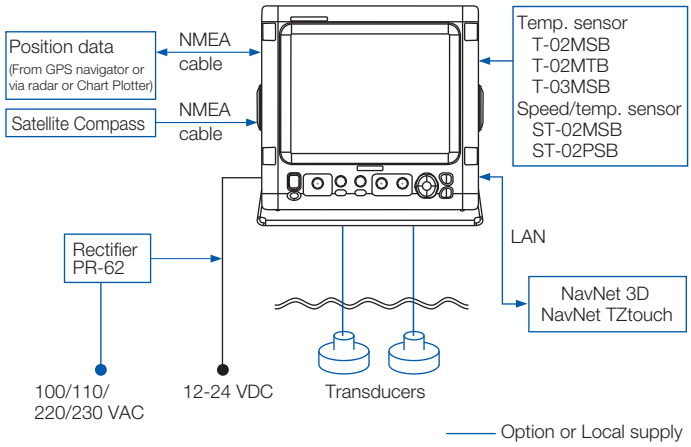

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Beware of similar products

FURUNO ELECTRIC CO., LTD.
Nishinomiya, Hyogo, Japan
www.furuno.com

FURUNO U.S.A., INC.
Camas, Washington, U.S.A.
www.furunousa.com

FURUNO (UK) LIMITED
Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO FRANCE S.A.S.
Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ITALIA S.R.L.
Gatteo Mare, Italy
www.furuno.it

FURUNO ESPAÑA S.A.
Madrid, Spain
www.furuno.es

FURUNO DANMARK A/S
Hvidovre, Denmark
www.furuno.dk

FURUNO NORGE A/S
Ålesund, Norway
www.furuno.no

FURUNO SVERIGE AB
Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY
Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. Z o.o.
Gdynia, Poland
www.furuno.pl

FURUNO EURUS LLC
St. Petersburg, Russian Federation
www.furuno.ru

FURUNO SINGAPORE
Singapore
www.furuno.sg

FURUNO DEUTSCHLAND GmbH
Rellingen, Germany
www.furuno.de

FURUNO HELLAS S.A.
Piraeus, Greece
www.furuno.gr

FURUNO (CYPRUS) LTD
Limassol, Cyprus
www.furuno.com.cy

FURUNO SHANGHAI CO., LTD.
Shanghai, China
www.furuno.com/cn

1511PDF Printed in Japan
Catalogue No. E-403e

To ask about this model or to buy

Every sale is made direct, so you can talk it through first

Call

Michael McGlinn

0494 901 661

sales@westcoastmarineelectronics.com.au

https://westcoastmarineelectronics.com.au/

West Coast Marine Electronics, Fremantle, Western Australia

This page was added by West Coast Marine Electronics. The pages of this brochure are the maker's own and have not been changed.
Makers change specifications from time to time, so please call to confirm before you rely on them.